


FOX METER, INC

INSTRUMENTATION FOR INDUSTRY

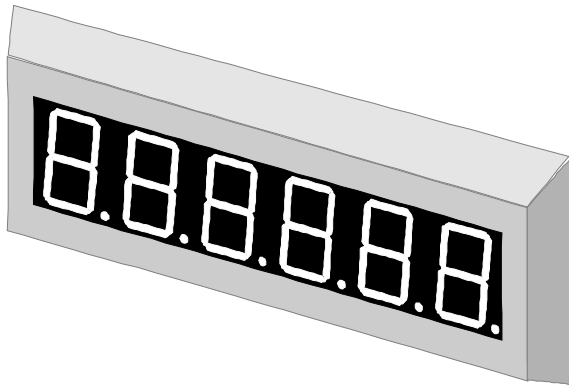

FG300 Series

High performance panel instruments
 uP based electronics, easily modified
 for those special applications that involve
 communications, counting, timing, speed or display

Functional Choices

- **FG310 - Universal remote display:** ASCII RS232, RS422, current loop or parallel BCD, menu selectable firmware drivers for many scales and intelligent sensors
- **FG320 - Clock remote:** ASCII remote display with lighted colons for use with F390 master clock
- **FG330 - Dual counter:** scaleable, < 2KHz pulsed or contact, non-contending dual count inputs
- **FG340 - Universal counter:** scaleable, bi-directional, quadrature, < 50 KHz pulsed or contact
- **FG350 - Rate meter / tachometer:** hour, minute, second and variable time base, fully scaleable rate
- **FG360 - Frequency meter:** 1 Hz to 10 MHz, decade shift menu selectable, precision gated counter
- **FG370 - Decade timers:** selectable time base from hours to .0001 seconds, 11 selectable modes
- **FG380 - HH:MM:SS timer:** like the F370 there are 11 program selectable control modes
- **FG390 - Master clock:** 12 or 24 hour, date modes, accurate time keeping to 2099!

General Specifications

Base meter

- **Display** - 6-digit, 3" tall tri-color LED
- **Bezel** - stainless steel
- **Display window** - non-glare glass with silicone seal
- **Sealing** - NEMA 4X gasketing standard
- **Controls** - setup menu is accessed via switches located on rear of meter
- **Connections** - socketed screw terminal connectors
- **Remote control inputs** - various functions available based on meter function
- **Viewing distance** - up to 150 feet
- **Operating temperature** - -55°C to +85°C


Outputs

- **Serial ASCII** - RS232, RS422/485, current loop
- **Parallel BCD** - 5 word / bit modes
- **Analog** - 4 To 20 mA, 1-5 V
- **Relay** - up to 4 setpoints, 200V @ 1A relay outputs require 1 F000-920 master setpoint module and up to 3 F000-924 slave setpoint modules

Power supplies

- **120 VAC** - 50 / 60 Hz, 20 mA maximum
- **120 VAC** - with battery backed data
- **220 VAC** - 50 / 60 Hz, 10 mA maximum

FG300 Series Mechanical Specifications

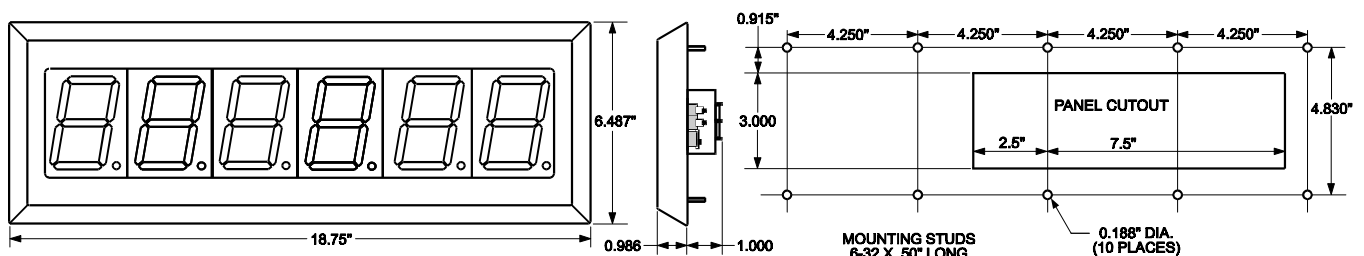

FG300 Series

3" 6-Digit Tri-Color

(Display, Clock, Timer, Counter, Frequency)

Model numbers consist of two prefix letters, a family number, a function number, a power supply number, and a three digit I/O configuration number. Family number 3 indicates base meter, family number 4 indicates the addition of the setpoint interface.

BASE METER OPTIONS F G -

FG[31] - Universal remote display.....	\$969	FG[41] - Universal remote display.....	\$1030
FG[32] - Clock remote.....	\$997	FG[42] - Clock remote.....	\$1057
FG[33] - Dual counter.....	\$1041	FG[43] - Dual counter.....	\$1074
FG[34] - Universal counter.....	\$1041	FG[44] - Universal counter.....	\$1074
FG[35] - Rate meter / tachometer.....	\$1046	FG[45] - Rate meter / tachometer.....	\$1085
FG[36] - Frequency meter.....	\$1046	FG[46] - Frequency meter.....	\$1085
FG[37] - Decade timers.....	\$1008	FG[47] - Decade timers.....	\$1068
FG[38] - HH:MM:SS timer.....	\$1008	FG[48] - HH:MM:SS timer.....	\$1068
FG[39] - Master clock.....	\$1014	FG[49] - Master clock.....	\$1074

POWER SUPPLY OPTIONS -

[1] - 120 VAC 50 / 60 Hz.....	\$0
[3] - 240 VAC 50 / 60 Hz.....	\$30
[8] - 120 VAC with battery backed data.....	\$50

INPUT / OUTPUT OPTIONS -

[651] - RS232C serial ASCII data.....	\$35
[652] - RS422 serial ASCII data.....	\$24
[653] - RS485 4-wire serial ASCII data.....	\$48
[655] - Isolated current loop ASCII data.....	\$72
[657] - RS232C and RS232C auxillary.....	\$179
[658] - RS232C and RS422 auxillary.....	\$168
[659] - No data inputs / no outputs.....	\$0
[661] - RS232C and 4 to 20 mA analog out.....	\$233
[662] - RS422 and 4 to 20 mA analog out.....	\$222
[665] - C/L and 4 to 20 mA analog out.....	\$270
[671] - RS232C and parallel data out.....	\$139
[672] - RS422 and parallel data out.....	\$128
[675] - C/L and parallel data out.....	\$176
[681] - RS232C and parallel data in.....	\$139
[682] - RS422 and parallel data in.....	\$128
[685] - C/L and parallel data in.....	\$176
[691] - Isolated 4 to 20 mA output.....	\$198
[692] - Parallel data outputs sinking.....	\$104
[693] - Parallel data inputs sinking.....	\$104
[694] - Parallel data outputs sourcing.....	\$104
[695] - Parallel data inputs sourcing.....	\$104